

Get a Quote

Overview

A901-12C-F-D is Cisco ASR 901 Series Aggregation Services Router Chassis, with Ethernet-only interfaces and DC power. Cisco ASR 901 Series Aggregation Services Routers are hardened, high-speed, low-power-consumption routers optimized for any-generation cell-site Radio Access Network (RAN) backhaul and Ethernet access. By using Cisco ASR 901 routers, operators can reduce backhaul operating costs, simplify and converge their RAN and Ethernet access networks, and enhance their profit opportunities with mobile and premium Ethernet services.

Quick Specs

Figure 1 shows the appearance of A901-12C-F-D.

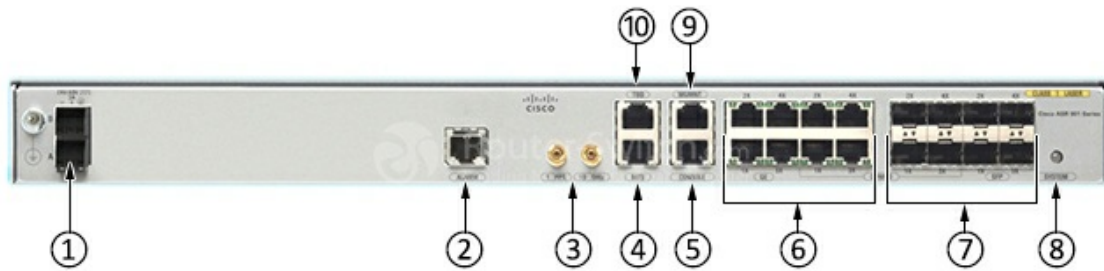


Table 1 shows the quick spec.

Model	A901-12C-F-D
Dimensions (H x W x D)	1.7 x 17.5 x 8.3 in. (43.2 x 444.5 x 211 mm), 1 RU
Weight	7.93 lb (3.6 kg)
Memory	Flash memory: 128 MB (onboard flash) System memory: 1 GB (DDR3)
Rack mounts	1 GE models: <ul style="list-style-type: none"> · 19-in. rack mount option · 23-in. rack mount option · Recessed rack mount option for 19-in. cabinets
Ethernet ports	4 100/1000 RJ-45 Gigabit Ethernet ports 4 x 1 SFP Gigabit Ethernet ports 4 x 1 Gigabit Ethernet Combo ports
Console port	1 (up to 115.2 Kbps)

Product Details

Figure 2 shows the front panel of A901-12C-F-D.



Notes:

(1)	Power Connector	(6)	8 GE Ports
(2)	Alarm	(7)	8 SFP Ports
(3)	MINI-Coax Connector (10MHZ) and MINI-Coax Connector (1PPS)	(8)	Power LED
(4)	BITS Port	(9)	Management Port
(5)	Console Port	(10)	ToD Port

Figure 3 shows the back view of A901-12C-F-D.



Compare to Similar Item

Table 2 shows the comparison between A901-12C-F-D and A901-12C-FT-D.

Model	A901-12C-F-D	A901-12C-FT-D
Description	Cisco ASR 901 Series Aggregation Services Router Chassis, Ethernet-only interfaces, DC power	Cisco ASR 901 Series Aggregation Services Router Chassis, Ethernet and TDM interfaces, DC power
Dimensions (H x W x D)	1.7 x 17.5 x 8.3 in. (43.2 x 444.5 x 211 mm), 1 RU	1.7 x 17.5 x 8.3 in. (43.2 x 444.5 x 211 mm), 1 RU
Weight	7.93 lb (3.6 kg)	8.15 lb (3.7 kg)
Memory	Flash memory: 128 MB (onboard flash) System memory: 1 GB (DDR3)	Flash memory: 128 MB (onboard flash) System memory: 1 GB (DDR3)

Get more information

Do you have any question about the Cisco A901-12C-F-D?

Specification

A901-12C-F-D Specifications	
Description	Cisco ASR 901 Series Aggregation Services Router Chassis, Ethernet-only interfaces, DC power
System Specifications	
Dimensions (H x W x D)	1.7 x 17.5 x 8.3 in. (43.2 x 444.5 x 211 mm), 1 RU
Weight	7.93 lb (3.6 kg)
Memory	Flash memory: 128 MB (onboard flash) System memory: 1 GB (DDR3)
Rack mounts	1 GE models: · 19-in. rack mount option · 23-in. rack mount option · Recessed rack mount option for 19-in. cabinets
Ethernet ports	4 100/1000 RJ-45 Gigabit Ethernet ports 4 x 1 SFP Gigabit Ethernet ports 4 x 1 Gigabit Ethernet Combo ports
Console port	1 (up to 115.2 Kbps)
External timing ports	BITS input, 10-MHz input/output, 1 PPS input/output, ToD interface, and SyncE
Fans	Dual fan, 1+1 redundancy
Air flow	Left to right airflow
Cabling	Front-panel access cabling and LED indicators
Power supplies	2 power supplies (DC only); module redundancy: 1:1
Mean Time Between Failure (MTBF)	614,790 hours
Power Specifications	
Power consumption	1 GE models: dual DC DC-input power and power dissipation:40W
Power rating	1 GE models: · DC-input voltage rating: 24 VDC, -48 VDC, -60 VDC · DC-input current rating: 2.5A maximum for non-TDM variants and 3.0A maximum for TDM variants
Power connector	6-position 2-tier stacked connector comprising two feeds, A and B DC power (AMPHENOL ELVA06100), and 3-position mating connectors for each feed (AMPHENOL ELVP03100)
Environmental Specifications	
Operating temperature¹	-40 to 149°F (-40 to 65°C)
Nonoperating temperature	-40 to 158°F (-40 to 70°C)
Relative humidity	10% to 85%, noncondensing, ±5 %
Operational altitude	13,000 ft (4000m) maximum 104°F (40°C) ambient
Acoustic noise²	66 dBA with 23 cfm fan
Air flow	46 cfm

Want to Buy

Order Now

Get a Quote

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com