




LigoWave

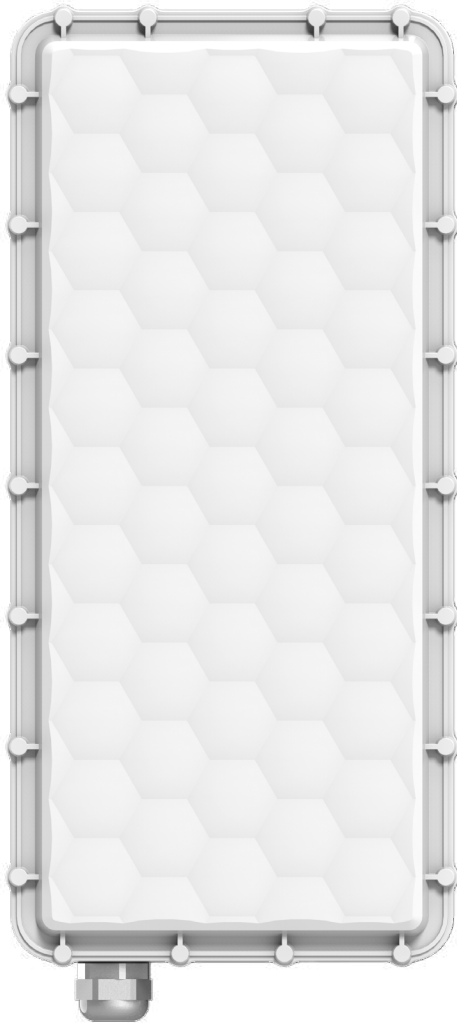

NFT 2ac SECTOR

A 2.4/5GHz Dual-Radio 802.11ac Outdoor Sector Access Point



NFT 2ac SECTOR

The NFT 2ac SECTOR is an outdoor Wi-Fi access point that utilizes the 802.11ac technology and integrated 2.4/5GHz 2x2 MIMO radios, boasting 29dBm of transmit power.

The device's gigabit Ethernet port with 802.3af/at support allows users to power up the device using PoE switches. The NFT 2ac SECTOR is specifically designed for cost-efficient, yet professional outside hotspot scenarios. The IP67-rated casing, integrated surge protection, and easy-to-use pole mounting ensure an effective and inexpensive solution for various applications, including public Wi-Fi, education, hospitality, retail, dining venues, and many more.



Infinity Controller

The Infinity Controller is an intuitive product and network management platform for your NFT devices. It allows easy, simple, and fast network installation, configuration, and control, all of which can be performed using a web browser. The Controller also facilitates network maintenance and expansion by automating these processes. The management platform can function as an integrated controller or as an external one (i.e. Infinity Cloud Controller), thus serving as an optimal solution for setting up and managing networks of any size.



Automated Device Onboarding

Automated device onboarding (ADO) is the process of automatically setting up Infinity access points that are introduced to the network. Not only does ADO eliminate the discrepancies caused by manual setup, but it also simplifies the deployment process and saves valuable time.

Automated device onboarding requires one-time configuration of the Cloud AP, after which the settings are automatically applied to all Infinity access points that are newly-connected to the network using a physical connection.



Flexible Network Scaling

The External Infinity Controller is designed with various types of networks in mind, whether they contain just a few access points or thousands of them.

Networks can be categorized into different logical groups (up to 4 layers) based on geographical location, service type, company branch, or other criteria. Each group can have different configurations assigned to them and access points can easily migrate between networks.

Furthermore, the External NFT Controller (installed on customer premises) supports multiple organizations simultaneously (many network owners).



Pay as You Grow

A cloud-based Infinity Controller account is free and supports a network of up to 10 Infinity wireless access points, but can be expanded as the business grows. Learn more about the paid version [here](#).



Predefined Scenarios for Your Applications

The Infinity Controller provides an array of features, collectively forming the optimal solution for multiple scenarios, e.g. a complete any-size office access point network, small café or shop hotspot, and an Easy Mesh application, which is popular among small hotels, schools, and hospitals.



IP Session Logging

Infinity access points allow users to track and log end-user credentials (source/destination IPs and ports, MAC address, etc.) on the Internet, thus allowing a safer and transparent Internet service.



Easy Mesh

Easy Mesh is LigoWave's solution to wireless network coverage expansion and device configuration automation. This feature is designed for the NFT Series (as well as DLB devices utilizing NFT firmware) and is only available on the External Infinity Controller.

The Infinity Controller allows users to set up an Easy Mesh network in a plain and simple way: just have at least one LAN-connected AP, create a new Easy Mesh network, assign devices to it, and you are good to go!



Proximity

LigoWave access points have an integrated mobile device detection feature. This means that any device within range can be logged using the MAC address and date/time without any user interaction.

The data is exported in real time and can be used to improve the services of an enterprise or managed service provider by importing them into proprietary applications for analytics and insights. An API is available upon request.

Our website provides information on LigoWave's technological partners that are using this functionality. Several of our technological partners are already using this functionality.



Professional Pole Mounting

The NFT 2ac SECTOR has a professional metal mounting bracket, designed for assembly and installation on poles.

It consists of easy-to-connect parts that allow robust mounting and precision tilting.

The design includes additional reinforcements and strong materials to ensure resilience in extreme climate conditions.

Technical Specifications

Wireless

WLAN Standard	IEEE 802.11a/b/g/n/ac
Radio Mode	Dual 2×2 MIMO
Operation Mode	Access Point, Repeater
Radio Frequency Band	2.402–2.482GHz (Country-Dependent) 5.150–5.850GHz (Country-Dependent)
Transmit Power	2.4GHz: 29dBm @ MCS0; 5GHz: 29dBm @ MCS0;
Channel Size	20, 40, 80MHz
Modulation Schemes	802.11ac: OFDM (256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) 802.11a/g/n: OFDM (64-QAM, 16-QAM, QPSK, BPSK) 802.11b: DSS (CCK, DQPSK, DBPSK)
Data Rates	802.11ac @ 80MHz: 866, 780, 650, 585, 520, 390, 260, 195, 130, 65Mbps 802.11n @ 40MHz: 300, 270, 240, 180, 120, 90, 60, 30Mbps 802.11a/g @ 20MHz: 54, 48, 36, 24, 18, 12, 9, 6Mbps 802.11b @ 20MHz: (11, 5.5, 2, 1Mbps)
Duplexing Scheme	Time Division Duplex
Wireless Security	WPA/WPA2 (TKIP/AES) Personal, WPA/WPA2 (TKIP/AES) Enterprise, WACL, Hotspot (UAM)

Antenna

Type	Integrated Dual-Polarized 2.4/5GHz 90° Sector Antenna
Gain	16dBi (2.4GHz) / 19dBi (5GHz)

Wired

Interface	1x10/100/1000 Base-T, RJ-45
-----------	-----------------------------

Physical

Dimensions without mount:

NFT 2ac SECTOR	Length 389 mm (15.3"), width 174 mm (6.8"), height 51 mm (2")
Mount length till pole	124 mm (4.8")

Weight including mount:

NFT 2ac SECTOR	2.77 kg (6.1 lb)
----------------	------------------

Power

Power method	802.3 af/at with passive PoE (37 - 56V) support
Power supply	100 – 240 VAC to 48 VDC PoE (included)
Power consumption (max)	19 W

Networking

Operating Mode	Bridge, Router IPv4 and IPv6
Management IPv4	Static, Dynamic
Management IPv6	Static, Dynamic Stateless, Dynamic Stateful
Secondary IPv4	Supported
VLAN	802.1Q for Management and Data
Virtual SSID	8 per radio
Band Steering	Supported

Traffic Management

Client Isolation	Supported
Wi-Fi Multimedia (WMM)	Supported
Multicast Enhancement	Supported
Concurrent Clients	254

Services

Services	SNMP server, NTP client, system alerts
Discovery Services	Bonjour, CDP/LLDP, SSDP

Environmental Specifications

Outdoor Ingress Protection Rating:	IP67
Surge Protection	EN61000-4-5, 10/700µs pulse
Operating Temperature	-40°C (-40°F) ~ +65°C (+149°F)
Humidity	0~95% (Non-Condensing)


Management

System Monitoring via SNMP v1, Full Management via External NFT Controller

Regulatory

Certification	FCC/IC/CE
---------------	-----------

Antenna specifications

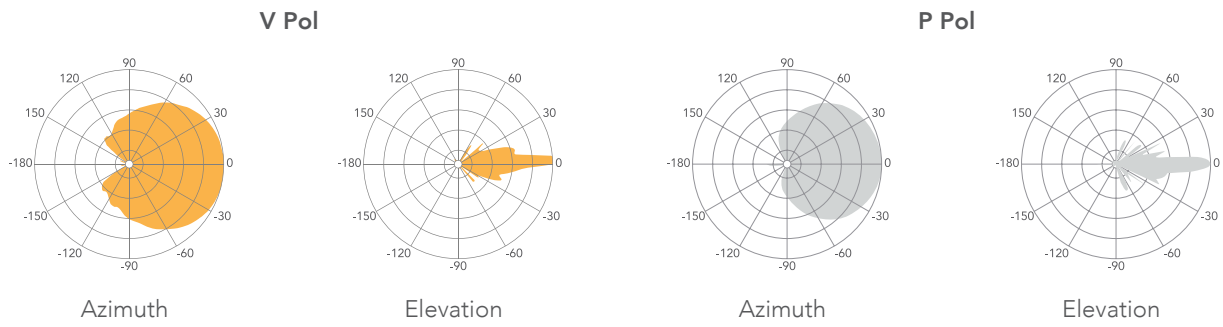

Frequency Range	2.4~2.483/5.1 - 5.9 GHz
Gain	16dBi/19dBi
Polarization	Dual-Linear
Cross-pol Isolation	24 dBi
VSWR	<1.8
Azimuth Beamwidth (H-Pol)	90°
Azimuth Beamwidth (V-Pol)	90°
Elevation Beamwidth	20°



LigoWave

www.ligowave.com

NFT 2ac SECTOR